


The AIM CAN-Bus Interface gives the possibility to connect an AIM and other Dashboard to the ProECU-K via the CAN-Bus. It uses the Hondata K-Pro 4 CAN Output Protocol which is preconfigured in some Dashboards.


Connection to Dashboard

Our Interface has a standard CAN-Bus Output which will connect direct to the Displays CAN-Bus.

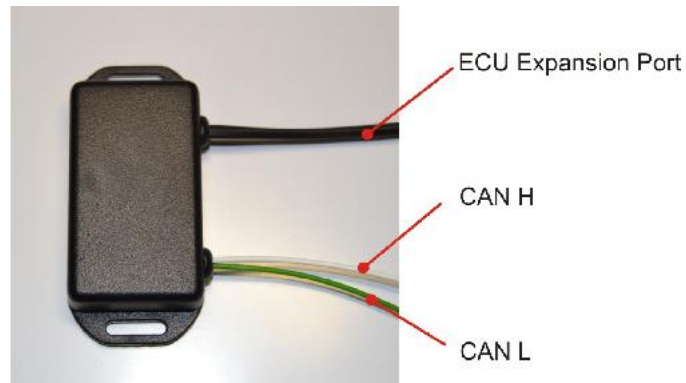

Connection to the ECU

Connect the AIM Interface to the ECUs or Expansion Box's Expansion Port.

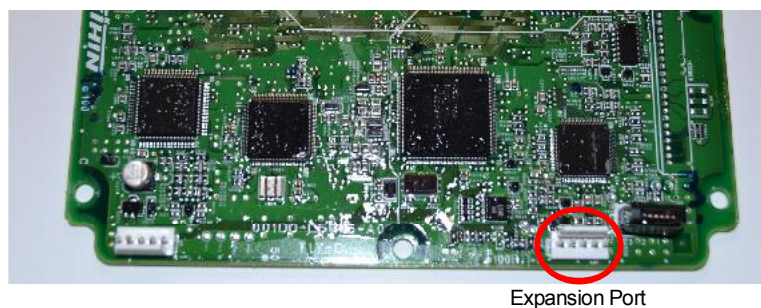

Configuration

For the Communication Setting in AIM Racestudio Software, choose as ECU Manufacturer "Hondata" and as ECU Model select "KPRO4_CAN". Our Interface sends out a compatible Data Stream.

