


With a Ethanol Content Sensor our ProECU-K turns your car into a Flex-Fuel Car. Compatible Sensors are the GM13577429 and GM13577394. Install the Ethanol Content Sensor into the fuel return line.

Do the electrical connection as follow:

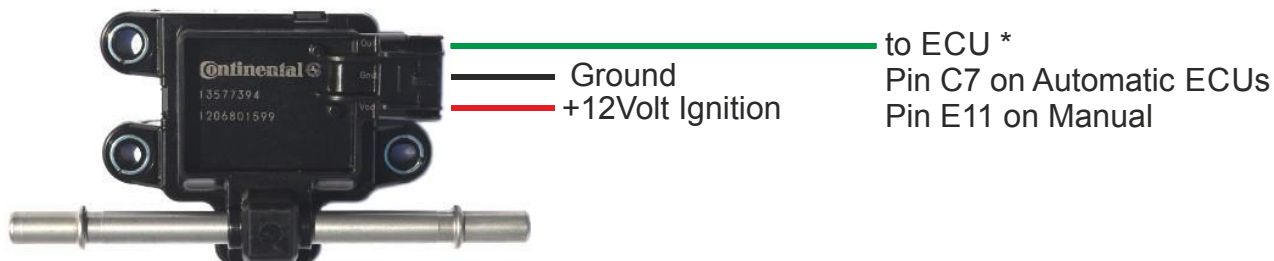

\* On a Automatic to Manual converted ECU, like the PND-A5x connect the Ethanol Content Sensor direct to Pin C7.

On the Manual ECUs (PRA, PRB, PRC, etc.) you need to modify the ECU to make a compatible input work. This is a easy task, you just need to add some inexpensive components to the ECU.

**Part List:**

- R527 1k8 [0805]
  - R528 3k3 [0805]
  - D544 BAS28W [SOT343] (or two individual Diodes in 0402 housing)
  - R529 32k [0805]
  - C521 100nF [0805]
- add a Wire from Pin C7 to E11

