


With a Ethanol Content Sensor our ProECU-K turns your car into a Flex-Fuel Car.  
Compatible Sensors are the GM13577429 and GM13577394.  
Install the Ethanol Content Sensor into the fuel return line.

Do the electrical connection as follow:

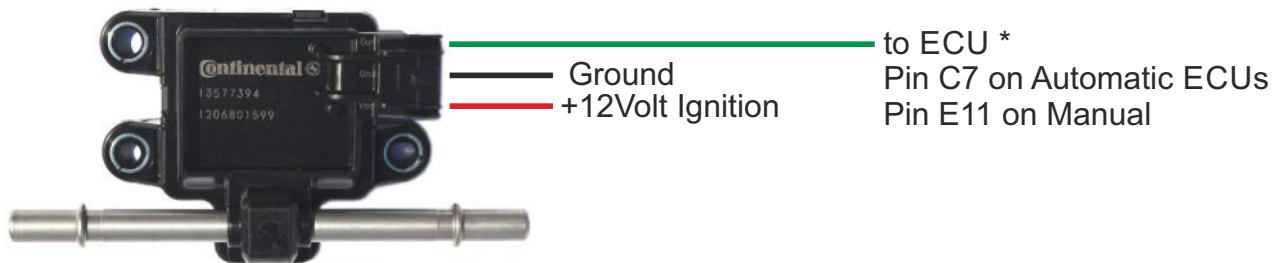

\* On a Automatic to Manual converted ECU, like the PND-A5x connect the Ethanol Content Sensor direct to Pin C7.

On the Manual ECUs (PRA, PRB, PRC, etc.) you need to modify the ECU to make a compatible input work. This is a easy task, you just need to add some inexpensive components to the ECU.

## Part List:

R527	1k8	[0805]
R528	3k3	[0805]
D544	BAS28W [SOT343]	(or two individual Diodes in 0402 housing)
R529	32k	[0805]
C521	10nF	[0805]
R530	12k	[0603]
R576	100k	[0603]

add a Wire from Pin C7 to E11

